

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/081926 A1

(51) International Patent Classification⁷: **G11B 7/007**

(21) International Application Number:
PCT/KR2004/000503

(22) International Filing Date: 11 March 2004 (11.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2003-0015858 13 March 2003 (13.03.2003) KR
10-2003-0019964 31 March 2003 (31.03.2003) KR
60/477,955 13 June 2003 (13.06.2003) US
10-2004-0007533 5 February 2004 (05.02.2004) KR

(71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO. LTD.** [KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si, 442-742 Gyeonggi-do (KR).

(72) Inventors: **HWANG, Sung-Hee**; 420-403 Jugong Apt., 189, Gaepo-dong, Gangnam-gu, 135-240 Seoul (KR).

KO, Jung-Wan; 315-401 Cheongmyung Maeul 3-danji, Daewoo Apt., 956-2, Yeongtong-dong, Yeongtong-gu, Suwon-si, 443-737 Gyeonggi-do (KR). **LEE, Kyung-Geun**; 229-1006 Sibeomdanji Woosung Apt., 16, Seohyun 1-dong, Bundang-gu, Seongnam-si, 463-050 Gyeonggi-do (KR).


(74) Agent: **LEE, Young-Pil**; The Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, 137-874 Seoul (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: WRITE ONCE DISC, METHOD OF MANAGING DATA AREA OF WRITE ONCE DISC, AND APPARATUS AND METHOD FOR REPRODUCING DATA THEREFOR

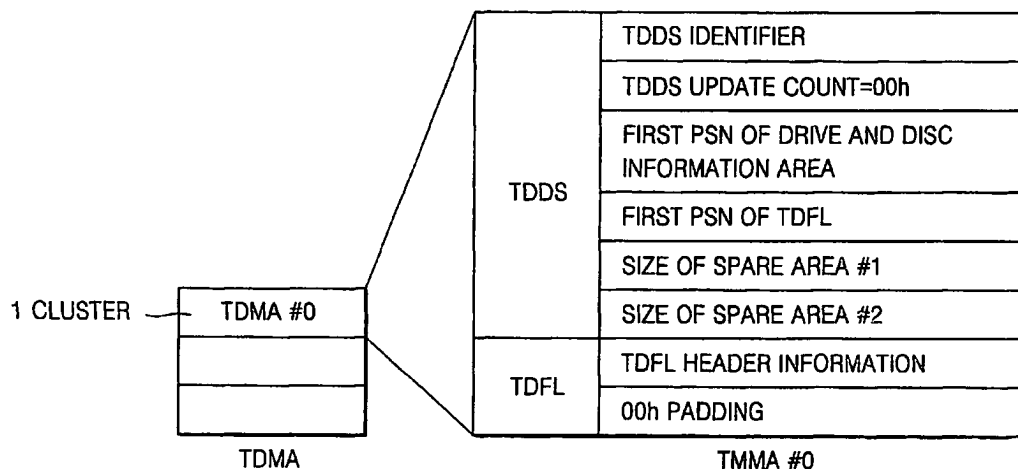

(57) Abstract: A write once disc allowing management of a data area, a method of managing the data area of the write once disc, an apparatus recording data on the write once disc, an apparatus and method of reproducing data from a write once disc. The write once disc, includes a lead-in zone, a data area, and a lead-out zone. The write once disc includes a predetermined area storing area allocation information which indicates whether at least one section of the data area is allocated for disc defect management. In the disc and method, area allocation information specifying a structure of the data area is recorded on the disc, thus allowing a recording/reproducing apparatus to recognize the data area structure. Therefore, allocating areas, such as a spare area, for disc defect management other than an area for storing user data, to the data area is possible. The allocation of the areas for disc defect management to the data area enables effective use of the write once disc.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

**WRITE ONCE DISC, METHOD OF MANAGING DATA AREA OF WRITE ONCE DISC,
AND APPARATUS AND METHOD FOR REPRODUCING DATA THEREFOR**

Technical Field

5 The present invention relates to a write once disc, and more particularly, to a write once disc which allows allocation of an area storing data other than user data, a method of managing a data area of the write once disc, an apparatus recording data in the write once disc, and a method and apparatus reproducing data from the write once disc.

10

Background Art

 Defect management is performed to allow a user to rewrite user data of a portion of a user data area in which a defect occurs to a new portion of the user data area of a disc, thereby compensating for a loss in data caused by the defect. In
15 general, defect management is performed using linear replacement or slipping replacement methods. In the linear replacement method, a user data area in which a defect occurs is replaced with a spare data area having no defects. In the slipping replacement method, a user data area having a defect is slipped to use the next user data area having no defects.

20 Both linear replacement and slipping replacement methods are applicable only to discs such as a DVD-RAM/RW on which data can be repeatedly recorded and recording can be performed using a random access method.

 Meanwhile, methods of disc defect management even on a write once disc on which rewriting of data is not allowed, using the linear replacement method have been
25 developed.

 However, there are cases where disc defect management cannot be performed on a write once disc with a recording/reproducing apparatus, using the linear replacement method. For instance, when data is recorded on the write once disc in

real time, it is difficult to perform disc defect management thereon with the recording/reproducing apparatus, using the linear replacement method.

For this reason, a spare area is allocated to a write once disc only when disc defect management using the recording/reproducing apparatus is required. That is,
5 the allocation of the spare area is determined by a user's intention.

Also, it is possible to allocate not only spare areas but also other areas to a data area of the write once disc for disc defect management, if necessary.

However, when other areas, not for user data, are allocated to the data area, the recording/reproducing apparatus is not capable of recognizing the structure of the
10 data area.

In other words, if the write once disc contains no information regarding the data area structure, the recording/reproducing apparatus is not capable of determining whether other areas for information other than user data are allocated to the data area or not, and determining the position and size of a user data area when the other areas
15 are formed.

After a write operation, information that specifies areas containing data is written in a bit map format to a predetermined area of a disc, thereby enabling facilitation of a further write operation or a read operation.

More specifically, a recordable area of a disc consists of a plurality of clusters
20 that are data recording units or error correction units. If clusters containing data and blank clusters are recorded as information in the bit map format, the recording/reproducing apparatus can readily access a desired area during a write or read operation.

In particular, bit map information specifying areas containing data is very
25 useful when using a write once disc. In other words, it is required to fast detect a cluster next to a cluster in which data is most recently recorded so as to write data to the write once disc. The bit map information enables fast detection of the next cluster.

Also, it is possible to check a change in the recording state of a write once disc and detect the original data recorded before the change occurs, using the bit map information. The disc recording state may change by recording further data to the write once disc containing data

5

Disclosure of the Invention

The present invention provides a write once disc on which both user data and other data can be recorded and managed in a data area.

10 The present invention also provides a disc whose data recording state can be easily checked.

The present invention also provides a method of managing a data area of a write once disc so that both user data and other data can be recorded and managed in the data area.

15 The present invention also provides a recording apparatus recording and managing both user data and other data in a data area of a write once disc.

The present invention also provides a method of reproducing data from a write once disc on which user data and other data are recorded in a data area.

The present invention also provides an apparatus reproducing data from a write once disc on which user data and other data are recorded in a data area.

20 According to an aspect of the present invention, there is provided a write once disc including a lead-in zone, a data area, and a lead-out zone, the disc including a predetermined area storing area allocation information that indicates whether at least one section of the data area is allocated for disc defect management.

25 According to another aspect of the present invention, there is provided a write once disc with at least one record layer, including at least one data area which stores user data, and at least one predetermined area which stores area allocation information,

which indicates whether at least one section of the at least one data area is allocated for disc defect management.

According to yet another aspect of the present invention, there is provided a method of managing a data area of a write once disc, receiving an instruction regarding whether allocation of at least one portion of the data area of the disc for disc defect management is required and recording area allocation information, which indicates whether the at least one section of the data area is allocated for disc defect management, in a predetermined area of the disc.

According to still another aspect of the present invention, there is provided a recording apparatus including a recording/reproducing unit which records data on or reads data from a write once disc; and a controller which controls the recording/reproducing unit to record area allocation information, which indicates whether at least one section of a data area of the disc is allocated for disc defect management, in a predetermined area of the disc, in response to an instruction regarding whether allocation of the at least one section to the data area is required.

According to still another aspect of the present invention, there is provided a method of reproducing data from a write once disc, including accessing a predetermined area of the disc to read area allocation information, and obtaining information regarding location of at least one section of a data area of the disc, which is allocated for disc defect management, from the area allocation information.

According to still another aspect of the present invention, there is provided an apparatus reproducing data from a write once disc, including a reading unit which reads the data from the disc, and a controller which controls the reading unit to access a predetermined area of the disc so as to read area allocation information and obtain information regarding a location of the at least one section of a data area of the disc, which is allocated for disc defect management, from the area allocation information.

Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

Brief Description of the Drawings

These and/or other aspects and advantages of the invention will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

FIGs. 1A and 1B illustrate structures of a write once disc according to embodiments of the present invention;

FIG. 2 illustrates a structure of a single record layer disc allowing management of a data area, according to an embodiment of the present invention;

FIG. 3 illustrates a detailed structure of the Temporary Disc Defect Structure (TDDS) area shown in FIG. 2;

FIG. 4 illustrates a detailed structure of the Space Bit Map (SBM) area of FIG. 2;

FIG. 5 illustrates a structure of a single record layer disc allowing management of a data area, according to another embodiment of the present invention;

FIG. 6 illustrates a detailed structure of the TDDS + SBM area shown in FIG. 5;

FIG. 7 illustrates a structure of a single record layer disc allowing management of a data area, according to another embodiment of the present invention;

FIG. 8 illustrates a detailed structure of the Temporary Disc Management Area (TDMA) shown in FIG. 7;

FIG. 9 illustrates a detailed structure of the disc & drive information + SBM area shown in FIG. 7;

FIG. 10 illustrates a structure of a single record layer disc allowing management of a data area, according to another embodiment of the present invention;

FIG. 11 illustrates a detailed structure of the TDMA #1 shown in FIG. 10;

FIG. 12 illustrates a detailed structure of a cluster, shown in FIG. 11, in which both an TDDS and an SBM are recorded;

FIG. 13 illustrates a detailed structure of a cluster containing disc initialization information obtained during disc initialization;

FIG. 14 illustrates a detailed structure of a cluster containing disc re-initialization information;

FIG. 15 illustrates a structure of an SBM area according to an embodiment of the present invention;

FIG. 16 illustrates a finalized SBM area according to an embodiment of the present invention;

FIG. 17 is a block diagram of a recording apparatus according to an embodiment of the present invention; and

5 FIG. 18 is a flowchart illustrating a method of managing a data area of a write once disc, according to an embodiment of the present invention.

Best mode for carrying out the Invention

Reference will now be made in detail to the embodiments of the present
10 invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below to explain the present invention by referring to the figures.

FIG. 1A illustrates a structure of a write once disc (hereinafter referred to as the 'disc') according to an embodiment of the present invention that is a single record
15 layer disc having a record layer *L0*. The disc includes a lead-in zone, a data area, and a lead-out zone. The lead-in zone is located in an inner part of the disc and the lead-out zone is located in an outer part of the disc. The data area is present between the lead-in zone and the lead-out zone and is divided into a user data area and a spare area. The spare area has a predetermined size starting from the beginning of the data
20 area.

FIG. 1B illustrates a disc that is a double record layer disc having two record layers *L0* and *L1*. A lead-in zone, a data area, and an outer area are sequentially formed from an inner part of the first record layer *L0* to its outer part. Also, an outer
25 area, a data area, and a lead-out zone are sequentially formed from an outer part of the second record layer *L1* to its inner part. Unlike the single record layer disc of FIG. 1A, the lead-out zone of the second record layer *L1* is present in the inner part of the second record layer *L1*. That is, the disc has an opposite track path (OTP) in which data is recorded starting from the lead-in zone at the inner part of the first record layer *L0* toward the outer part and continuing from the outer area of the second record layer
30 *L1* to the lead-out zone at the inner part. Spare areas are allocated to the first and second record layers *L0* and *L1*, respectively.

In this embodiment, the spare areas are present between the lead-in zone and the user data area and between the outer area and the user data area. However, the positions and numbers of spare areas are not limited.

Initialization of a disc according to the present invention will now be described.

5 Disc initialization is a preliminary record operation that is performed prior to use of a disc. More specifically, information regarding the structure of a data area is written to a predetermined area of the disc, thereby enabling a recording/reproducing apparatus to recognize the data area structure. The information specifies whether areas, e.g., a spare area, in which data, regarding disc defect management using a
10 recording/reproducing apparatus, other than user data is recorded are allocated to a data area, and specifies the positions of the areas allocated to the data area. If disc initialization information, i.e., the information regarding the data area structure, is recorded after the disc initialization, the recording/reproducing apparatus is capable of checking the presence and positions of the areas in which information other than the
15 user data is recorded and detecting an area in which the user data is to be recorded.

Hereinafter, embodiments of a disc in which a spare area for disc defect management is formed in a data area, according to the present invention, will be described with reference to FIGs. 2 through 9.

FIG. 2 illustrates a structure of a single record layer disc allowing management
20 of a data area, according to an embodiment of the present invention. Referring to FIG. 2, a lead-in zone of the disc includes Defect Management Areas (DMA) *DMA1* and *DMA2*, a recording condition test area, a Temporary Disc Defect Structure (TDDS) area, a Temporary DeFect List (TDFL) area, a space bit map area, and a disc & drive information area.

25 In general, when a disc is loaded into a recording/reproducing apparatus, the recording/reproducing apparatus reads information from a lead-in zone and/or a lead-out zone to determine how to manage the disc and perform a read/write operation.

Therefore, if the amount of the information recorded in the lead-in zone and/or the lead-out zone increases, a longer time will be spent preparing the recording or
30 reproducing of the data after loading the disc. To solve this and/or other problems, the

present invention proposes temporary management information containing a TDDS and a TDFL, the temporary management information being recorded in a TDFL or a TDDS formed, separated from the lead-in zone and/or the lead-out zone.

If no more data will be recorded on the disc, the recording/reproducing apparatus begins disc finalization during which the recorded TDFL and TDDS are recorded as defect management information in the DMA. Through the disc finalization, only the most recently recorded TDFL and TDDS are copied to the DMA. Accordingly, the recording/reproducing apparatus can complete disc initialization rapidly by reading only the most recently updated information from the DMA. In this case, the defect management information is stored in a plurality of areas, thereby increasing the reliability of information.

Disc defect management according to this embodiment uses the linear replacement method, and thus, the TDFL specifies an area, i.e., a defective area, of the disc in which a defect occurs, and a replacement area that substitutes for the defective area. The TDFL further specifies whether the defective area is a single defective cluster, or a continuous defective cluster in which a series of defects occur physically. The TDDS, which is information managing the TDFL, specifies the recording position of the TDFL.

The lead-in zone includes the space bit map (SBM) area that contains bit map information regarding an area containing data, i.e., information regarding a data recordable area.

The data area includes spare areas #1 and #2 and a user data area.

In this embodiment, the spare areas #1 and #2 are formed at the start and end of the data area, respectively, for a case where disc defect management is performed using a recording/reproducing apparatus during disc initialization.

The lead-out zone includes DMAs #3 and #4 and other areas.

When a user decides to perform disc defect management using the recording/reproducing apparatus and instructs the recording/reproducing apparatus to

allocate spare areas in a data area, the recording/reproducing apparatus allocates the spare areas #1 and #2 to predetermined portions of the data area, e.g., at the start and end of the data area. Then, the recording/reproducing apparatus records area allocation information, which indicates the allocation of the spare areas #1 and #2, in a first cluster of a TDDS area. The area allocation information may specify the sizes of the allocated spare areas #1 and #2. If starting and ending addresses of the spare areas #1 and #2 are determined, for example, when the spare areas #1 and #2 are positioned at the start and end of the data area, respectively, the recording/reproducing apparatus can recognize the allocation of the spare areas #1 and #2 and the position and size of each spare area based on information regarding the spare area sizes.

When the starting and ending addresses of the spare areas #1 and #2 are not predetermined, the starting and ending addresses are determined and recorded or the information regarding sizes of the spare areas #1 and #2 is recorded in the first cluster of the TDDS area.

In this embodiment, the area allocation information is recorded in the TDDS area but can be recorded in another area.

After recording the area allocation information in the first cluster of the TDDS, a bit map is recorded in a first cluster of the SBM area, the bit map recording bit corresponding to the positions of the first clusters of the TDDS and the SBM area with 1 and recording bits corresponding to the positions of the other clusters as 0.

If the user does not desire to perform disc defect management using the recording/reproducing apparatus, the recording/reproducing apparatus records the area allocation information, which describes the sizes of the spare areas #1 and #2 as 0, in the first cluster of the TDDS.

After recording the area allocation information in the TDDS, a bit map, which indicates the bits corresponding to the positions of the first clusters of the TDDS and the SBM area as 1 and indicates the bit corresponding to the positions of the other clusters as 0, is recorded in the first cluster of the SBM area.

As previously mentioned, it is possible to change the structure of the data area by re-initializing the disc and updating the area allocation information, even if the area allocation information was recorded in the TDDS and data was recorded on the disc during the previous disc initialization. Disc re-initialization will be later described with reference to FIG. 14.

When the user does not require disc defect management using the recording/reproducing apparatus, no information will be recorded in the DMA. In this case, the area allocation information recorded in the TDDS area is recorded in the DMA even if disc finalization is not being performed.

Meanwhile, a re-writable disc does not include the TDDS, and thus, reproducing information from a disc with a TDDS area containing area allocation information, using a reproducing apparatus for re-writable discs is not possible because of incompatible data structures. To solve this and/or other problems, information recorded in the TDDS area is copied to a DMA when performing disc finalization on the disc.

In other words, if disc defect management using the recording/reproducing apparatus will not be performed, the area allocation information recorded in the TDDS area is recorded in the DMA prior to disc finalization, thereby enabling reproduction of information from a disc using a re-writable disc reproducing apparatus.

FIG. 3 illustrates a structure of the TDDS area shown in FIG. 2, according to an embodiment of the present invention.

A TDDS is recorded in a cluster of a TDDS area at least once until a recording operation ends. In general, a plurality of TDDS #0, TDDS #1, ... are recorded in the TDDS area. In this embodiment, TDDS #0 is recorded in a cluster of a TDDS area once when a recording operation ends.

Referring to FIG. 3, the TDDS area consists of a plurality of clusters. A cluster is a basic unit of record and consists of a predetermined number of sectors. A sector is a physical basic unit of a disc.

During disc initialization, when a user determines whether a spare area will be allocated or not, area allocation information indicating the user's determination is recorded in the TDDS #0. The TDDS #0 includes a TDDS identifier, counter information indicating the number of updates to the TDDS #0, position information
5 regarding drive information, position information regarding a corresponding TDFL, if any, information regarding the size of a spare area #1, and information regarding the size of a spare area #2. As previously described, when the user does not require disc defect management using the recording/reproducing apparatus and allocates spare areas in a data area, the sizes of spare areas #1 and #2 are recorded as '0'.

10 Although a detailed structure of a TDFL area is not illustrated, a TDFL #i contains information regarding defects occurring in data recorded during a recording operation #i and information regarding replacements for the defects. Also, previous TDFLs #0, #1, #2, ..., #i-1 are not accumulated in the TDFL #i and only information regarding defects occurring in a recording area made during the corresponding
15 recording operation #i is recorded in the TDFL #i, thereby minimizing a recording capacity and enabling efficient use of a recording space of a TDDS.

FIG. 4 illustrates a structure of the SBM area shown in FIG. 2, according to an embodiment of the present invention. The SBM area comprises a plurality of clusters and each SBM #i is recorded in a cluster.

20 Each SBM #i includes an SBM header area and a bit map area. In the SBM header area, SBM identifier information, counter information indicating the number of updates to the SBM #i, and a finalization flag are recorded. The finalization flag will be later described.

The bit map area contains a bit map that indicates clusters containing data
25 and blank clusters with different bit values in cluster units with respect to entire recordable areas of a disc.

After recording a TDDS #0, an SBM #0 is recorded in a first cluster of the SBM area. In the bit map of the SBM #0, a bit corresponding to the position of a first cluster

of a TDDS and a bit corresponding to the position of the first cluster are expressed with 1, and bits corresponding to the remaining clusters are expressed with 0.

Accordingly, recording size information regarding spare areas in the TDDS #0 allows the recording/reproducing apparatus to check the presence of spare areas and
5 determine the positions or sizes of allocated spare areas. Also, the recording/reproducing apparatus is capable of rapidly recognizing an area containing data and a blank area of the disc by recording the SBM #0 after recording the TDDS #0.

In the disc, shown in FIG. 2, a TDDS area, a TDFL area, and an SBM area are
10 individually formed and a TDDS, a TDFL, and an SBM are recorded therein in cluster units, respectively. However, recording of the TDDS and the SBM is not limited to these areas, that is, they may be recorded in different areas.

FIG. 5 illustrates a structure of a single record layer disc allowing management of a data area, according to an embodiment of the present invention. In this
15 embodiment, a lead-in zone includes an area in which both a TDDS and an SBM are recorded.

When a user desires to perform disc defect management using a recording/reproducing apparatus and instructs the recording/reproducing apparatus to allocate spare areas, the recording/reproducing apparatus allocates spare areas #1 and
20 #2 at the start and end of a data area in predetermined sizes, respectively.

Then, the recording/reproducing apparatus records allocation information, which indicates the allocation of the spare areas #1 and #2, in first clusters of the TDDS and the SBM.

FIG. 6 illustrates a detailed structure of the TDDS + SBM area shown in FIG. 5.
25 Referring to FIG. 6, a TDDS and an SBM are recorded in a cluster. The TDDS contains size information, i.e., area allocation information, regarding each spare area and the SBM, and the SBM contains a bit map.

After recording the area allocation information in a first cluster of the TDDS + SBM area, the bit map records a bit for the position of the first cluster of the TDDS + SBM area as 1 and bits for the positions of the other clusters as 0.

FIG. 7 illustrates a structure of a single record layer disc management of a data area, according to an embodiment of the present invention. In this embodiment, a lead-in zone includes a Temporary Disc Management Area (TDMA) area in which both a TDFL and a TDDS are recorded, and a disc & drive information + SBM area in which both disc and drive information and an SBM are recorded. That is, the TDFL and TDDS are recorded in a cluster and the disc & drive information and SBM are recorded in a cluster.

Similarly to the embodiments shown in FIGs. 2 and 5, a user determines disc defect management using a recording/reproducing apparatus and instructs the recording/reproducing apparatus to allocate spare areas to a data area of a disc. Then, the recording/reproducing apparatus allocates spare areas #1 and #2 to the start and end of the data area in predetermined sizes.

Next, the recording/reproducing apparatus records area allocation information that indicates the allocation of the spare areas #1 and #2 in a first cluster of the TDMA.

FIG. 8 illustrates a detailed structure of the TDMA shown in FIG. 7. The TDMA consists of clusters in which disc defect management information is recorded. In each cluster, a TDDS and a TDFL are recorded. The TDDS contains information regarding positions of the spare areas, the information being area allocation information.

FIG. 9 illustrates a detailed structure of the disc & drive information + SBM area shown in FIG. 7, according to an embodiment of the present invention.

Each cluster contains disc & drive information and SBM information. The SBM information contains a bit map.

Information regarding spare areas is recorded in a first cluster of a TDMA. Next, a bit map indicates bits for first clusters of the TDMA and the disc & drive information and SBM area with 1 and bits for the remaining clusters with 0.

FIG. 10 illustrates a structure of a single record layer disc allowing
5 management of a data area, according to an embodiment of the present invention. Unlike the disc according to the embodiments described above, the disc of FIG. 10 further includes a TDMA #2 in a data area, in addition to a TDMA #1 in a lead-in zone.

The TDMA #1 and #2 are different from each other in that updated information is recorded in the TDMA #1 either before ejecting of a disc from a
10 recording/reproducing apparatus or during disc initialization, and updated information is recorded in the TDMA #2 in operation units during the recording of data on the disc. Here, the operation units are units in which a verify-after-write method is facilitated. In the verify-after-write method, data is recorded in cluster units and then verified.

If a TDMA is allocated only to a lead-in zone, the size of the TDMA is limited,
15 thus making it difficult to frequently update information. The number of necessary information updates may be reduced by updating a TDDS when ejecting the disc from the recording/reproducing apparatus. However, in this case, the updating of the TDDS will be incompletely terminated when power to the recording/reproducing apparatus is interrupted due to an unexpected accident, such as a power failure, during a write
20 operation.

To solve this and/or other problems, the disc of FIG. 10 further includes the TDMA #2 in the data area. The TDDS is updated and recorded in the TDMA #2 in units in which the verify-after-write method is facilitated, thereby preparing for a failure in updating the TDDS due to an interruption of the power supply. Just prior to
25 ejecting the disc, final defect information and state information regarding the disc are repeatedly recorded in both the TDMA #1 and #2, thereby increasing the robustness of information.

The reason for forming the TDMA #2 in the data area is that frequent updating of information in the TDMA #2 requires the TDMA #2 to be spacious. On the other

hand, the TDMA #1 is not required to be spacious and thus is formed in the lead-in zone (or a lead-out zone).

If a user does not desire disc defect management using a recording/reproducing apparatus or does not require allocation of the TDMA #2 although the user wants disc defect management using the recording/reproducing apparatus during disc initialization, the TDMA #2 will not be allocated to the data area and area allocation information indicating this information is recorded in the TDMA #1.

FIG. 11 illustrates a detailed structure of the TDMA #1 shown in FIG. 10.

Referring to FIG. 11, a TDFL, a TDDS, and an SBM are recorded in the TDMA #1.

More specifically, both the TDDS and the SBM are recorded in a cluster *TDDS + SBM* #*k* and the TDFL is recorded in another cluster (*k* is an integer greater than 0). The TDMA #2 has the same construction as the TDMA #1 and its detailed description will be omitted.

FIG. 12 illustrates a detailed structure of the cluster *TDDS + SBM* #*k*, shown in FIG. 11, in which both a TDDS and an SBM are recorded. Referring to FIG. 12, the TDDS specifies the positions of a recording condition test area, drive information, a TDFL, spare areas #1 and #2, a TDMA #2, a TDDS + SBM area for another record layer, and a TDDS + SBM area for another TDMA.

If the starting and ending addresses of each area of the disc are determined, information regarding the sizes of spare areas #1 and #2 and TDMA #2 as their position information is sufficient. Otherwise, the position information is indicated with their starting and ending addresses corresponding to each area of the disc.

If the disc has at least two record layers, an SBM for each record layer is required.

FIG. 13 illustrates a detailed structure of a cluster *TDDS + SBM* #0 containing disc initialization information obtained during disc initialization. FIG. 13 illustrates a case where spare areas #1 and #2 and a TDMA #2 are formed in a data area. Referring to FIG. 13, information regarding sizes of spare areas #1 and #2 and the

TDMA#2 is recorded as disc initialization information. In this case, it is understood that starting and ending addresses of each area have already been determined.

Even if spare areas are allocated to the data area and the disc is initialized by recording area allocation information that indicates the allocation, the structure of the data area may be changed by re-initializing the disc and updating the area allocation information.

FIG. 14 illustrates a detailed structure of a cluster *TDDS + SBM #n+1* containing disc re-initialization information. Referring to FIG. 14, information that specifies a change in the sizes of spare areas #1 and #2 and a TDMA #2 is recorded in a TDDS area.

Let us assume that the spare area #1, the TDMA #2, a user data area, and the spare area #2 are sequentially formed in a data area, and defect information is recorded in the spare area #2 starting from a cluster with the largest address to a cluster with the smallest address. In this case, disc re-initialization is performed to effectively use a recording area between a cluster with the largest address of the user data area and the cluster with the smallest address of the spare area #2.

In other words, the disc re-initialization increases or decreases the size of the spare area #2, thus enabling effective use of the recording area.

Disc re-initialization information is recorded in at least one cluster *TDDS + SBM* belonging to a TDMA #1 or the TDMA #2.

Hereinafter, an SBM that is information regarding a data recording area will be described in greater detail.

FIG. 15 illustrates a structure of an SBM area according to an embodiment of the present invention. Referring to FIG. 15, SBMs #0 through #n, which provide data recording area information, are recorded in the SBM area. In this embodiment, an SBM #i is recorded in a cluster (i is an integer from 0 to n). However, as illustrated in FIGs. 6 through 9, SBM #i may be recorded together with other information in a cluster.

Each SBM #i provides header information containing an SBM descriptor, a finalization flag, and an update counter; and a bit map #i (i is an integer from 0 to n) that indicates recordable areas of entire recording areas of the disc in cluster units.

5 If data is further recorded on the disc and data recording area information changes, each SBM #i, which contains a new bit map describing data recording areas, is generated and recorded. In this case, the update counter represents the number of times the data recording area information is updated.

10 An instant of time when each SBM #i is generated and updated may be differently determined depending on a program installed in a recording/reproducing apparatus. However, after recording data on the disc, a new SBM #i must be generated and recorded before ejecting the disc from the recording/reproducing apparatus.

The finalization flag indicates whether the disc is finalized or not.

15 FIG. 16 illustrates a finalized SBM area according to an embodiment of the present invention. The finalization flag for a header of an SBM is set to 0 and recorded together with other information. Referring to FIG. 16, an SBM recorded right before disc finalization is an SBM #n. If a finalization command is given from a host such as a computer to a recording/reproducing apparatus, the recording/reproducing apparatus indicates completion of disc finalization by changing a finalization flag among
20 information regarding the SBM #n, which is last updated, from 0 to 1, and recording the SBM #n again.

If necessary, the recording/reproducing apparatus may allow no more SBMs to be recorded by recording data such as "ffh" in an area next to an area containing the SBM #n having the finalization flag '1', thereby preventing additional recording of data
25 on the disc.

A user can maintain the recording state of the disc at an instant of time when disc finalization is performed, based on an SBM having the finalization flag '1'. Even if data recorded on the finalized disc is changed or new data is added to the original data without permission, detecting the original data recorded during the disc finalization by

referring to a bit map contained in the SBM having the finalization flag '1' is possible. Therefore, data that is added after the disc finalization can be easily detected.

An area in which each SBM #i is recorded is positioned in at least one of a data area, a lead-in zone, and a lead-out zone as shown in FIGs. 1A and 1B.

5 Spare areas and TDMA's are allocated to a data area in the above embodiments, but an area to which the spare areas and the TDMA's are allocated and areas allocated to the data area are not limited. For example, a TDMA area and a TDDS area may be further allocated to the data area. Also, a TDDS area and an SBM area are allocated to a lead-in zone in the above embodiments but may be formed
10 in a data area or a lead-out zone.

Although not shown in the drawings, a TDFL area may be formed in the data area. In this case, if a user desires disc defect management using a recording/reproducing apparatus, the user allocates a spare area #1, a spare area #2, and the TDFL area and records a TDDS and an SBM as described above. The TDFL
15 may be positioned between the lead-in zone and the spare area #1, between the spare area #1 and a user data area, at the middle of the user data area, between the user data area and the spare area #2, and between the spare area #2 and a lead-out area,

If the user does not desire disc defect management using the recording/reproducing apparatus, the allocation of spare areas is not required.
20 However, if the user records data in real time using disc defect information obtained by scanning a disc, the TDFL area is required to store the disc defect information. Therefore, the TDFL is allocated during disc initialization.

In the above embodiments according to the present invention, management of spare areas and recording of a bit map are described with respect to a single record
25 layer disc. However, the present invention can be applied to a dual record layer disc.

A write once disc according to the present invention includes a TDMA for disc defect management. However, if the disc is a re-writable disc, the disc includes a DMA but does not include a TDMA. Therefore, a re-writable disc recording/reproducing apparatus is not capable of reproducing/recording data from/on a disc with a TDMA,

that is, a disc compatibility issue is caused. For a solution to the disc compatibility, a TDFL recorded in a TDDS area is copied to a TDMA prior to finalization of the disc.

FIG. 17 is a block diagram of a recording/reproducing apparatus according to an embodiment of the present invention. Referring to FIG. 17, the recording/reproducing apparatus includes a recording/reproducing unit 1, a controller 2, and a memory 3.

Under control of the controller 2, the recording/reproducing unit 1 records data on a disc 100 according to the present invention and reads the data from the disc 100 to verify the accuracy of the recorded data.

The controller 2 manages a data area of the disc 100. Also, the controller 2 performs a verify-after-write method in which data is recorded on the disc 100 in predetermined units and the accuracy of the recorded data is verified to detect if an area of the disc 100 has a defect. More specifically, the controller 2 records user data on the disc 100 in predetermined units and verifies the recorded user data to detect an area of the disc 100 in which a defect exists. Next, the controller 2 creates a Temporary DeFect List (TDFL) and a Temporary Disc Defect Structure (TDDS) that specify a position of the area with the defect. Next, the controller 2 temporarily stores the created TDFL and TDDS in the memory 3. When the amount of the stored TDFL and TDDS reaches a predetermined level, the controller 2 records the TDFL and TDDS in a predetermined area, e.g., a Temporary Disc Management Area (TDMA), of the disc 100.

Here, the disc 100 includes discs according to the aforementioned embodiments of the present invention.

When a user decides to perform disc defect management using the recording apparatus such as that shown in FIG. 17 and instructs the recording apparatus to allocate spare areas in a data area, the recording apparatus allocates the spare areas, e.g., a spare area #1 and a spare area #2, to predetermined portions of the data area of the disc, e.g., at the start and end of the data area.

Then, the recording/reproducing apparatus records area allocation information, which indicates the allocation of the spare areas #1 and #2, in a first cluster of a TDDS.

The area allocation information may specify sizes of the allocated spare areas #1 and #2. If starting and ending addresses of the spare areas #1 and #2 are determined, for example, when the spare areas #1 and #2 are positioned at the start and end of the data area, respectively, the recording apparatus can recognize the allocation of the spare areas #1 and #2 and also the positions and sizes of the spare areas #1 and #2 based only on information regarding the spare area sizes.

For this reason, when the starting and ending addresses of the spare areas #1 and #2 are not determined, these addresses are determined and recorded or the information regarding sizes of the spare areas #1 and #2 is recorded in the first cluster of the TDDS.

A method of managing a data area of a disc using a recording apparatus according to an embodiment of the present invention will now be described with reference to FIGs. 17 and 18.

FIG. 18 is a flowchart illustrating a method of managing a data area of the disc 100, according to an embodiment of the present invention. Initialization of the disc 100 is performed in response to user input before recording user data on the disc 100 (operation 110). Next, an instruction regarding whether allocation of at least one section of a data area of the disc 100 for disc defect management is required or not is transmitted to the controller 2 from a host apparatus such as a computer (operation 120). As previously mentioned, allocation of a section, such as a spare area or a TDMA, of the data area for disc defect management is regarded as well known to those skilled in the art. Alternatively, a recording/reproducing apparatus other than the host apparatus is capable of determining whether the at least one section of the data area will be allocated.

Next, the controller 2 controls the recording/reproducing unit 1 to record area allocation information, which describes whether the at least one section of the data area has been allocated or not, in a predetermined area of the disc 100 (operation 130).

The area allocation information may specify a size of the at least one portion for disc defect management.

Assuming that, as shown in FIG. 2, the at least one section for disc defect management includes a spare area #1 and a spare area #2 and a starting position of the spare area #1 and an ending position of the spare area #2 have been located at a start and end of the data area, respectively. In this case, a recording apparatus is capable of recognizing not only allocation of the spare areas #1 and #2, but also their location and sizes based only on information regarding the sizes of the spare areas #1 and #2.

When a user does not require disc defect management when using the recording apparatus and does not allocate the at least one section, such as a spare area, of the data area, the area allocation information indicating the size of the at least one section as 0 is recorded in a predetermined area of the disc 100.

The area allocation information may be recorded in a TDDS formed in at least one of a lead-in zone, a data zone, and a lead-out zone of the disc 100. Also, a TDDS may be recorded in various areas as shown in FIGs. 3, 6, 8, and 12.

After the initialization of the disc 100 is completed by recording the area allocation information on the disc 100 in operation 130, the recording apparatus may record the user data on the disc 100 and perform disc defect management.

After operation 130, the recording apparatus records the user data in a user data area of the disc 100 and performs disc defect management using the spare areas and the TDMA (operation 140).

Even after disc initialization, re-initialization of the disc 100 allows changing of a structure of the data area of the disc 100.

Next, the disc 100 is re-initialized in response to user input (operation 150). Then, a command that instructs the structure of the data area to be redefined by allocation of new areas thereto is input from the host apparatus to the controller 2.

Then, the controller 2 controls the recording/reproducing unit 1 to record area allocation information regarding the new areas in a predetermined area of the disc 100, thereby updating the area allocation information (operation 160).

Information, e.g., an SBM, regarding areas containing data is recorded on the disc 100. Header information of the SBM includes a finalization flag that represents whether more data can be recorded on a disc. When the finalization flag is 1, a change in a disc recording state may be checked and the original data before the change may be detected, using a bit map corresponding to the finalization flag 1.

If the user does not desire to perform disc defect management using the recording apparatus, no data is recorded in a DMA. Thus, the area allocation information recorded in the TDMA is recorded in the DMA regardless of whether disc finalization is completed or not.

Because a re-writable disc does not include a TDDS area, reproducing data from a write one disc with a TDMA containing area allocation information, using a re-writable disc reproducing apparatus is not possible due to compatibility problems. To solve this and/or other problems, information recorded in the TDMA is recorded in the DMA during disc finalization, thereby enabling disc compatibility.

If disc defect management using the recording apparatus is not required, the area allocation information recorded in the TDMA is recorded in the DMA before disc finalization, thereby enabling reproduction of data from the disc using the re-writable disc reproducing apparatus.

For example, although not shown in the drawings, a reproducing apparatus reproducing data from the disc 100 containing the area allocation information, according to the present invention, having a similar structure to that of the recording apparatus of FIG. 17 except that the reproducing apparatus includes only a reproducing unit, for only data reading, instead of the recording/reproducing unit 1 of the recording/reproducing apparatus. When the disc 100 is loaded into the reproducing apparatus according to the present invention, the reproducing apparatus accesses a predetermined area, e.g., a TDMA, which contains the last updated area allocation

information so as to read the last updated area allocation information. Then, the reproducing apparatus obtains, from the last updated area allocation information, information regarding the location of at least one section of the data area for disc defect management. As described above, the at least one section includes the TDMA and the spare areas. Because the reproducing apparatus is capable of completely recognizing a structure of the data area based on the area allocation area, the reproducing apparatus can read not only the user data but also data, for disc defect management, which is stored in the TDMA and the spare areas allocated to the data area.

As described above, according to the present invention, area allocation information regarding a structure of a data area is recorded on a write once disc, thus allowing a recording/reproducing apparatus to recognize the data area structure. Therefore, allocating areas, such as a spare area, for disc defect management other than an area for storing user data, to the data area, enables efficient use of the disc.

Also, after disc initialization, the structure of the data area may be changed by updating the area allocation information through disc re-initialization.

Further, a bit map, which specifies data recordable areas, is recorded in a predetermined area of the disc, thereby enabling the recording/reproducing apparatus to quickly access a desired area. The bit map also allows the recording/reproducing apparatus to check whether there is a change in a disc recording state and detect data originally recorded before the change, the change being occurred by recording additional data on the disc.

Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

CLAIMS

1. A write once disc including a lead-in zone, a data area, and a lead-out zone, the disc comprising:

5 a predetermined area storing area allocation information that indicates whether at least one section of the data area is allocated for disc defect management.

2. The disc of claim 1, wherein the area allocation information comprises information specifying a size of the at least one section of the data area.

10 3. The disc of claim 1, wherein the section allocated to the data area for disc defect management includes at least one of a spare area, a temporary disc defect structure (TDDS) area, a temporary defect list (TDFL) area, and a temporary defect management area (TDMA).

15 4. The disc of claim 1, further comprising:
a space bit map (SBM) information area in which data recording area information is recorded,

20 wherein the data recording area information contains header information and a bitmap that indicates areas containing data.

5. The disc of claim 4, wherein when the area allocation information is recorded in a predetermined cluster of the predetermined area, a bit of the bitmap corresponding to the predetermined cluster is recorded as a predetermined value that
25 indicates the predetermined cluster contains data.

6. The disc of claim 4, wherein the header information comprises a finalization flag that indicates whether more data is recordable on the disc.

30 7. The disc of claim 3, wherein the predetermined area in which the area allocation information is recorded is the TDDS area.

8. The disc of claim 7, further comprising a defect management area (DMA) in which the area allocation information recorded in the TDDS area is copied when the data area does not include an area for disc defect management.

5 9. The disc of claim 1, further comprising:
a first temporary defect management area (TDMA) formed in the lead-in zone;
and
a second TDMA formed in the data area,
wherein the area allocation information indicates allocation of the second TDMA
10 to the data area, and the predetermined area in which the area allocation information is recorded is one of the first and second TDMAs.

10. The disc of claim 9, wherein the first TDMA is an area in which an updated TDDS is recorded at least once before ejecting the disc from a recording and/or
15 reproducing apparatus, and
the second TDMA is an area in which the updated TDDS is recorded in units of predetermined operations during which data is recorded.

11. The disc of claim 1, wherein the area allocation information is recorded in
20 at least one cluster of the predetermined area and updated area allocation information is recorded in at least one different cluster of the predetermined area.

12. A method of managing a data area of a write once disc, comprising:
receiving an instruction regarding whether allocation of at least one section of the
25 data area of the disc for disc defect management is required; and
recording area allocation information, which indicates whether the at least one section of the data area is allocated for disc defect management, in a predetermined area of the disc.

30 13. The method of claim 12, wherein the recording the area allocation information comprises recording information specifying a size of the at least one section of the data area.

14. The method of claim 12, wherein the recording of the area allocation information comprises recording the area allocation information in a temporary disc defect structure (TDDS) area formed in at least one of a lead-in zone, the data area, and a lead-out zone of the disc.

5 15. The method of claim 12, further comprising:
recording information regarding a data recordable area,
wherein the information regarding a data recordable area comprises header information and a bit map that indicates areas containing data.

10 16. The method of claim 15 wherein the recording of the information regarding the data recordable area comprises recording a bit value of the bit map corresponding to a predetermined area that contains data indicating whether the at least one section of the data area is allocated, as a predetermined value indicating an
15 area containing data.

17. The method of claim 15, wherein the header information comprises a finalization flag that indicates whether more data is recordable on the write once disc.

20 18. The method of claim 13, wherein the recording the area allocation information comprises recording the area allocation information to indicate the size of the at least one section as 0 when the at least one section of the data area is not allocated.

25 19. The method of claim 12, further comprising:
recording the area allocation information, which is recorded in a temporary defect management area (TDMA), in a defect management area (DMA).

30 20. The method of claim 12, wherein the at least one section of the data area comprises at least one of a spare area, a TDDS area, a TDFL area, and a TDMA.

21. The method of claim 12, wherein the recording the area allocation information comprises recording the area allocation information, which indicates allocation of a second TDMA to the data area, in one of a first TDMA and the second TDMA which are formed in a lead-in zone of the disc.

5

22. The method of claim 21, wherein the first TDMA is an area in which an updated TDDS is recorded before ejecting the write once disc from a recording and/or reproducing apparatus, and

the second TDMA is an area in which the updated TDDS is recorded in units of predetermined operations during which data is recorded.

10

23. The method of claim 12, further comprising:

updating the area allocation information by recording area allocation information, which specifies a change in a size of the at least one section, in a predetermined area in response to a command that instructs the size of the at least one section to be changed.

15

24. The method of claim 14, wherein during the recording the area allocation information, the area allocation information is recorded in at least one cluster starting from a start of the TDDS.

20

25. A recording and/or reproducing apparatus, comprising:

a recording and/or reproducing unit which records data on or reads data from a write once disc; and

a controller which controls the recording and/or reproducing unit to record area allocation information, which indicates whether at least one section of a data area of the disc is allocated for disc defect management, in a predetermined area of the disc, in response to an instruction regarding whether allocation of the at least one section to the data area is required.

25

30

26. The apparatus of claim 25, wherein the area allocation information includes information specifying a size of the at least one section.

27. The apparatus of claim 25, wherein the controller controls the recording and/or reproducing unit to record the area allocation information in a temporary disc defect structure (TDDS) formed in at least one of a lead-in zone, the data area, and a lead-out zone of the disc.

5

28. The apparatus of claim 25, wherein the controller controls the recording and/or reproducing unit to record information regarding a data recordable area in a predetermined area of the disc,

wherein the information regarding the data recordable area comprises a bitmap indicating header information and the data recordable area.

10

29. The apparatus of claim 28, wherein the controller controls the recording and/or reproducing unit to record a bitmap value, which corresponds to the predetermined area storing the area allocation information indicating whether the at least one section of the data area is allocated, as a predetermined value indicating an area containing data.

15

30. The apparatus of claim 28, wherein the header information comprises a finalization flag indicating whether more data is recordable on the disc.

20

31. The apparatus of claim 26, wherein the controller controls the recording and/or reproducing unit to record the area allocation information indicating a size of the at least one section as 0 when the at least one section of the data area is not allocated.

25

32. The apparatus of claim 25, wherein the controller controls the recording and/or reproducing unit to record the area allocation information, which is recorded in a temporary defect management area (TDMA), in a defect management area (DMA).

30

33. The apparatus of claim 25, wherein the at least one section comprises at least one of a spare area, a TDDS area, a TDFL area, and a TDMA.

34. The apparatus of claim 25, wherein the controller controls the recording and/or reproducing unit to record the area allocation information, which indicates allocation of a second TDMA to the data area, in one of a first TDMA and the second TDMA which are formed in a lead-in zone of the disc.

5

35. The apparatus of claim 34, wherein the first TDMA is an area in which updated TDDS is recorded at least once before the disc is ejected from the recording apparatus, and

the second TDMA is an area in which the updated TDDS is recorded in
predetermined operation units.

10

36. The apparatus of claim 25, wherein the controller controls the recording/reproducing unit to record the area allocation information, which includes information specifying a size of the at least one section, in the predetermined area of the disc, in response to a command that instructs the at least one section to be changed.

15

37. The apparatus of claim 27, wherein the controller controls the recording/reproducing unit to record the area allocation information in at least one cluster starting from a start of the TDDS.

20

38. A method of reproducing data from a write once disc, comprising:
accessing a predetermined area of the disc to read area allocation information;
and

25

obtaining information regarding a location of at least one section of a data area of the disc, which is allocated for disc defect management, from the area allocation information.

39. The method of claim 38, wherein the area allocation information
comprises information specifying a size of the at least one section.

30

40. The method of claim 38, wherein the predetermined area storing the area allocation information is a TDDS area formed in at least one of a lead-in zone, the data area, and a lead-out zone of the disc, and

wherein the area allocation information is included in the TDDS.

5

41. The method of claim 38, wherein the at least one section comprises at least one of a spare area, a TDDS area, a TDFL are, and a TDMA.

10

42. An apparatus reproducing data from a write once disc, comprising:
a reading unit which reads data from the disc; and
a controller which controls the reading unit to access a predetermined area of the disc to read area allocation information and obtain information regarding a location of at least one section of a data area of the disc, which is allocated for disc defect management, from the area allocation information.

15

43. The apparatus of claim 42, wherein the area allocation information comprises information specifying a size of the at least one section.

20

44. The apparatus of claim 42, wherein the predetermined area storing the area allocation information is a TDDS area formed in at least one of a lead-in zone, the data area, and a lead-out zone of the disc, and
the area allocation information is included in the TDDS.

25

45. The apparatus of claim 42, wherein the at least one section comprises at least one of a spare area, a TDDS area, a TDFL area, and a TDMA.

30

46. A write once disc with at least one record layer, comprising:
at least one data area which stores user data; and
at least one predetermined area which stores area allocation information, which indicates whether at least one section of the at least one data area is allocated for disc defect management.

47. The disc of claim 46, wherein the area allocation information comprises information specifying a size of the at least one section.

48. The disc of claim 46, wherein the at least one section comprises at least one of a spare area, a TDDS area, a TDFL area, and a TDMA.

49. The disc of claim 46, wherein the area allocation information indicates a size of the at least one section as 0 when the at least one section of the data area is not allocated.

10

50. A recording medium, comprising:

a first area having a first predetermined size storing defect management information;

a second area having a second predetermined size used to record user data;

15

and

a third area having a third predetermined size storing data replacing defective units detected within the second area based on the defect management information, wherein the second area is adjacent to the first area.

20

51. The recording medium of claim 50, wherein the first area is at least one of a lead-in area and a lead-out area on the recording medium.

52. The recording medium of claim 50, wherein the first, second, and third predetermined sizes of the respective corresponding areas of the recording medium are changed by reinitializing the recording medium to update the respective predetermined sizes.

25

53. The recording medium of claim 52, wherein when defect management will not be performed the predetermined size of the third area is set to zero to maximize the size of the second area.

30

54. The recording medium of claim 50, wherein the recording medium is a write once optical disc.

55. The recording medium of claim 54, wherein the first area is at least one of a lead-in area and a lead-out area on the write once optical disc.

5 56. The recording medium of claim 55, wherein the first area is divided into a plurality of defect management areas positioned adjacent to each other.

57. The recording medium of claim 56, wherein the first, second, and third predetermined sizes of the respective corresponding areas of the write once disc are
10 changed by reinitializing the write once disc to update the respective predetermined sizes.

58. The recording medium of claim 57, wherein when defect management will not be performed the predetermined size of the third area is set to zero to maximize the
15 size of the second area.

59. The recording medium of claim 56, wherein at least one of the plurality of defect management areas is a space bit map area specifying bit map information corresponding to a data recordable area, wherein a recording/reproducing apparatus is
20 able to quickly access a desired area.

1/17

FIG. 1A


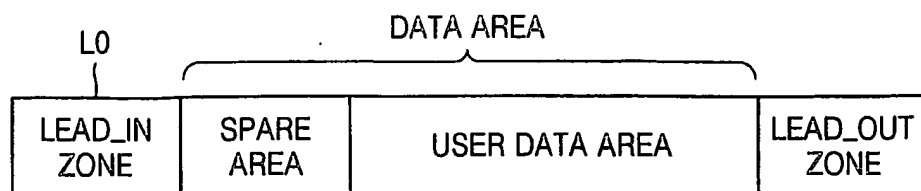


FIG. 1B

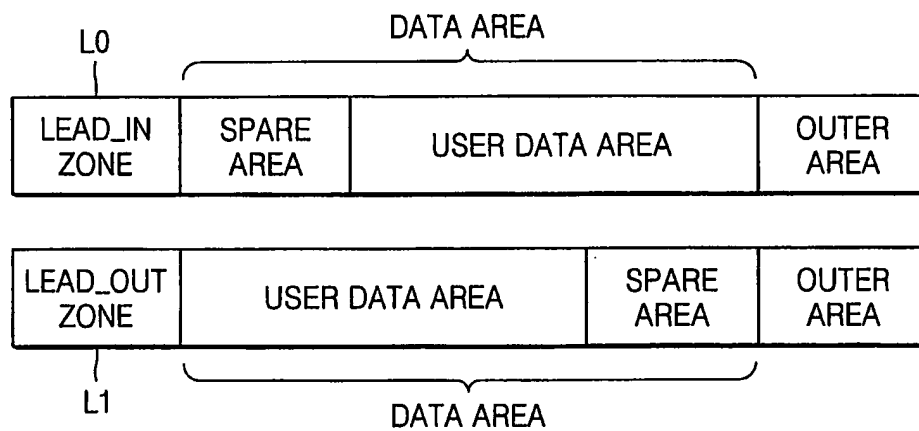

2/17

FIG. 2

LEAD_IN ZONE	...
	DMA#2
	RECORDING CONDITION TEST AREA
	TDDS AREA
	TDFL AREA
	SPACE BIT MAP AREA
	DISC AND DRIVE INFORMATION AREA
	DMA#1
	...
DATA AREA	SPARE AREA1
	USER DATA AREA
	SPARE AREA2
LEAD_OUT ZONE	...
	DMA #4
	...
	DMA #3
	...

3/17

FIG. 3


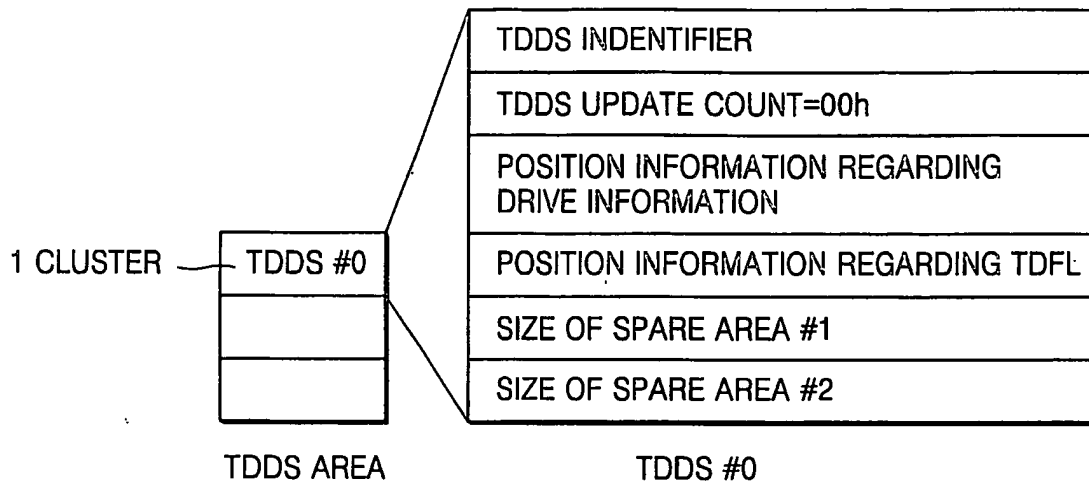


FIG. 4

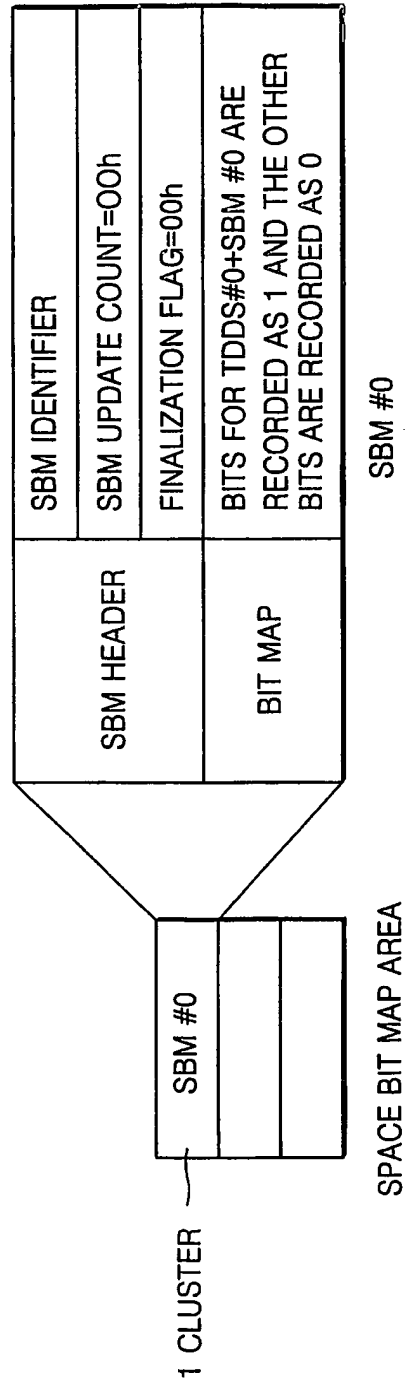


5/17

FIG. 5

LEAD_IN ZONE	...
	DMA #2
	RECORDING CONDITION TEST AREA
	TDDS+SBM AREA
	TDFL AREA
	DISC AND DRIVE INFORMATION AREA
	DMA #1
	...
DATA AREA	SPARE AREA1
	USER DATA AREA
	SPARE AREA2
LEAD_OUT ZONE	...
	DMA #4
	...
	DMA #3
	...

FIG. 6

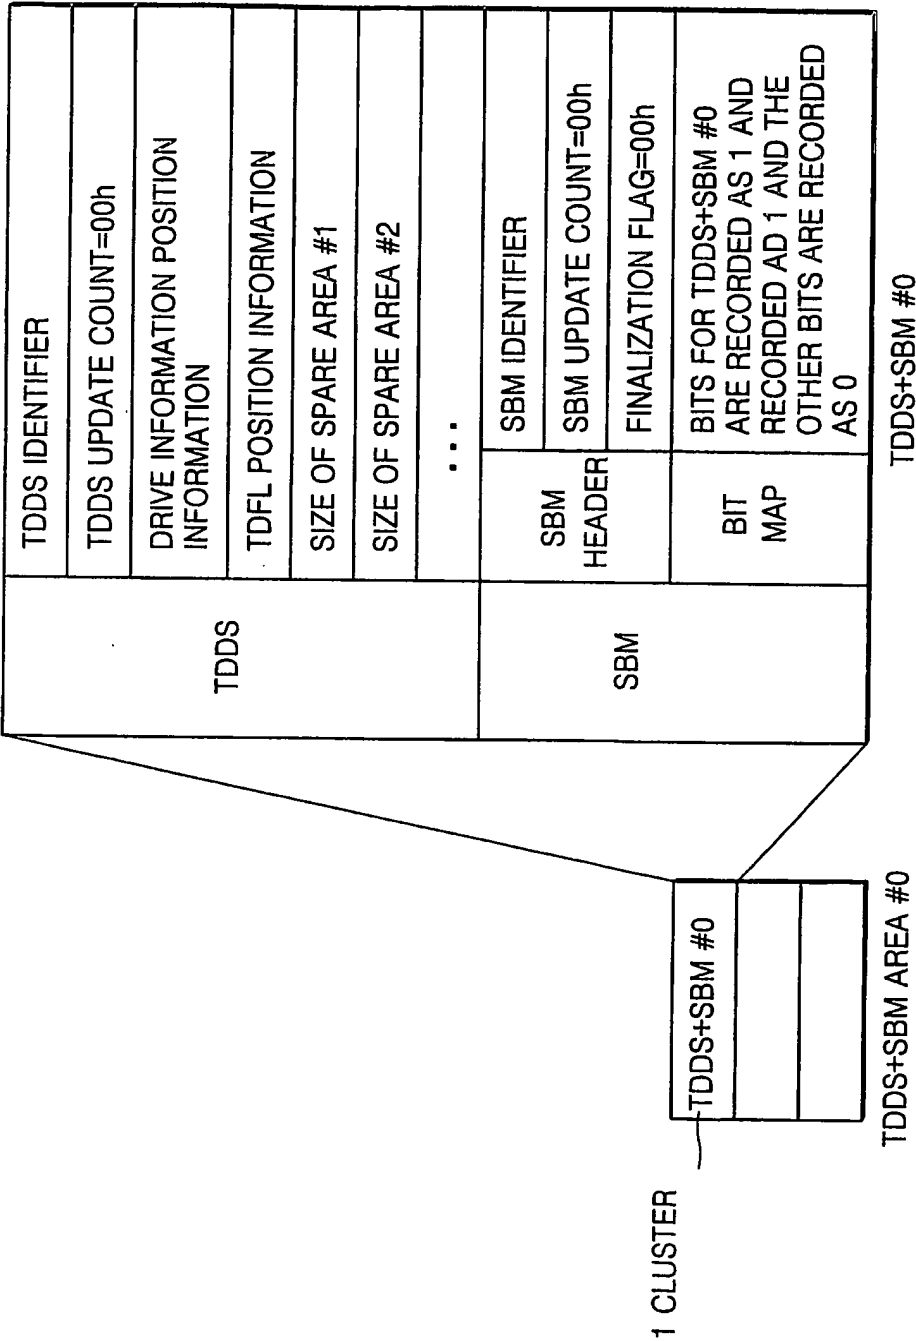

7/17

FIG. 7

LEAD_IN ZONE	...
	DMA #2
	RECORDING CONDITION TEST AREA
	TDMA
	DISC AND DRIVE INFORMATION+ SPACE BIT MAP AREA
	DMA #1
	...
DATA AREA	SPARE AREA1
	USER DATA AREA
	SPARE AREA2
LEAD_OUT ZONE	...
	DMA #4
	...
	DMA #3
	...

FIG. 8


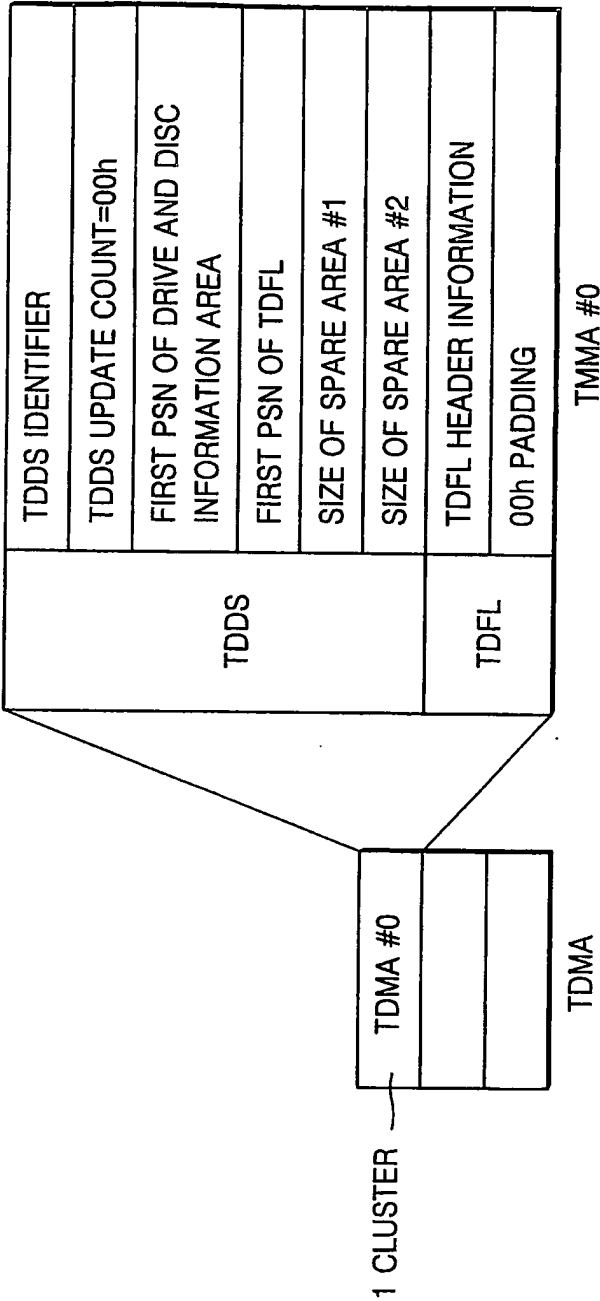


FIG. 9

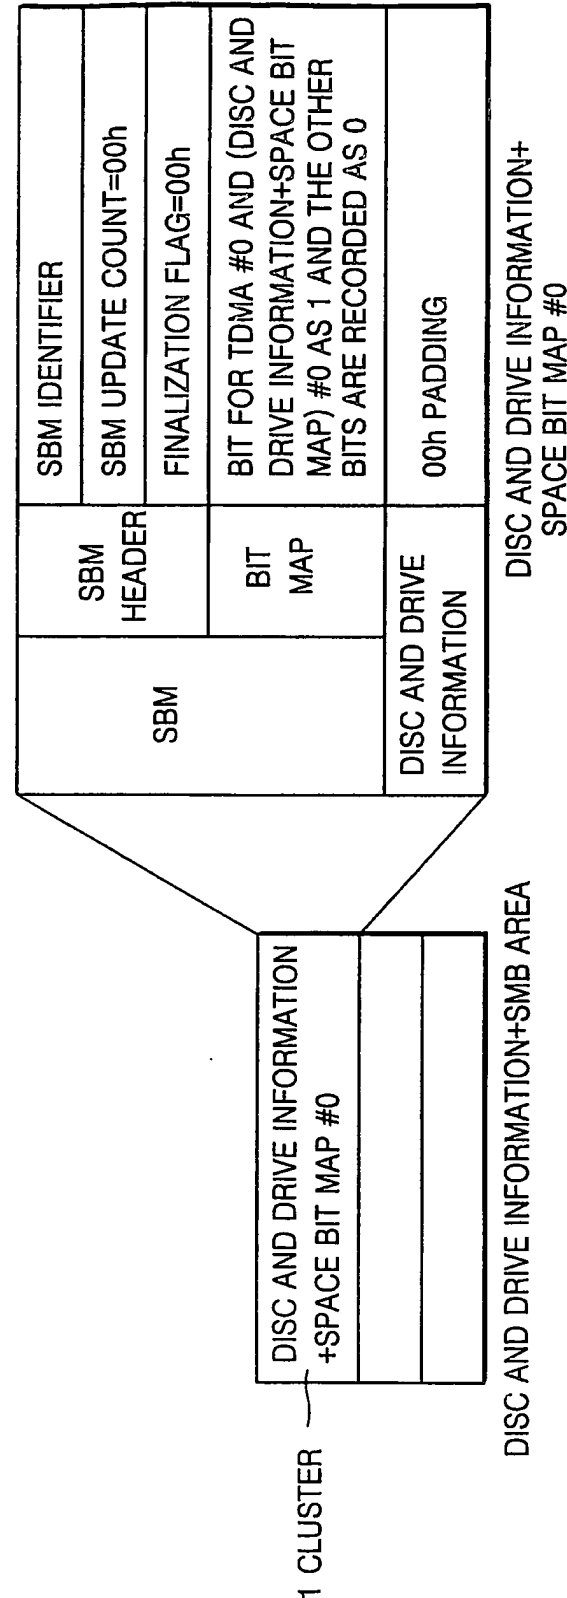

10/17

FIG. 10

LEAD_IN ZONE	...
	DMA #2
	RECORDING CONDITION TEST AREA
	TDMA #1
	DRIVE INFORMATION AREA
	DMA #1
	...
DATA AREA	SPARE AREA1
	USER DATA AREA
	TDMA #2
	SPARE AREA2
LEAD_OUT ZONE	...
	DMA #4
	...
	DMA #3
	...

11/17

FIG. 11

TDDS+SBM #0
TDFL #0
TDDS+SBM #1
□ □ □

TDMA #1

FIG. 12

TDDS	TDDS IDENTIFIER	
	TDDS UPDATE COUNT	
	DRIVE INFORMATION POSITION INFORMATION	
	TDFL POSITION INFORMATION	
	RECORDING CONDITION TESTABLE POSITION INFORMATION	
	POSITION INFORMATION REGARDING TDDS+SBM AREA FOR ANOTHER RECORD LAYER	
	POSITION INFORMATION REGARDING TDDS+SBM IN ANOTHER TDMA	
	SIZE OF TDMA #2	
	SIZE OF SPARE AREA #1	
	SIZE OF SPARE AREA #2	
	...	
SBM	SBM HEADER	SBM IDENTIFIER
		SBM UPDATE COUNT
		FINALIZATION FLAG
	BIT MAP	...

12/17

FIG. 13

TDDS	TDDS IDENTIFIER	
	TDDS UPDATE COUNT=00h	
	POSITION INFORMATION REGARDING DRIVE INFORMATION	
	TDFL POSITION INFORMATION=00h	
	RECORDING CONDITION TESTABLE POSITION INFORMATION	
	POSITION INFORMATION REGARDING TDDS+ SBM IN ANOTHER RECORD LAYER=00h	
	POSITION INFORMATION REGARDING TDDS+ SBM IN ANOTHER TDMA=00h	
	SIZE OF TDMA #2	
	SIZE OF SPARE AREA #1	
	SIZE OF SPARE AREA #2	
	...	
SBM	SBM HEADER	SBM IDENTIFIER
		SBM UPDATE COUNT=00h
		FINALIZATION FLAG=0
	BIT MAP	...

13/17

FIG. 14

TDDS	TDDS IDENTIFIER	
	TDDS UPDATE COUNT= $n+1$	
	POSITION INFORMATION REGARDING DRIVE INFORMATION	
	TDFL POSITION INFORMATION	
	RECORDING CONDITION TESTABLE POSITION INFORMATION	
	POSITION INFORMATION REGARDING TDDS+SBM IN ANOTHER RECORD LAYER	
	POSITION INFORMATION REGARDING TDDS+SBM IN ANOTHER TDMA	
	SIZE OF CHANGED SPARE AREA #1	
	SIZE OF CHANGED SPARE AREA #2	
	...	
SBM	SBM HEADER	SBM IDENTIFIER
		SBM UPDATE COUNT= $n+1$
		FINALIZATION FLAG=0
	BIT MAP	...

14/17

FIG. 15

SBM #0	FINALIZATION FLAG=0
	UPDATE COUNTER=0
	BIT MAP #0
SBM #1	FINALIZATION FLAG=0
	UPDATE COUNTER=1
	BIT MAP #1
...	...
SBM #n	FINALIZATION FLAG=0
	UPDATE COUNTER=n
	BIT MAP #n
...	...


15/17

FIG. 16

SBM #0	FINALIZATION FLAG=0
	UPDATE COUNTER=0
	BIT MAP #0
SBM #1	FINALIZATION FLAG=0
	UPDATE COUNTER=1
	BIT MAP #1
...	...
SBM #n	FINALIZATION FLAG=0
	UPDATE COUNTER=n
	BIT MAP #n
SBM #n	FINALIZATION FLAG=1
	UPDATE COUNTER=n
	BIT MAP #n
NON-RECORDING AREA	ffh
...	...


16/17

FIG. 17

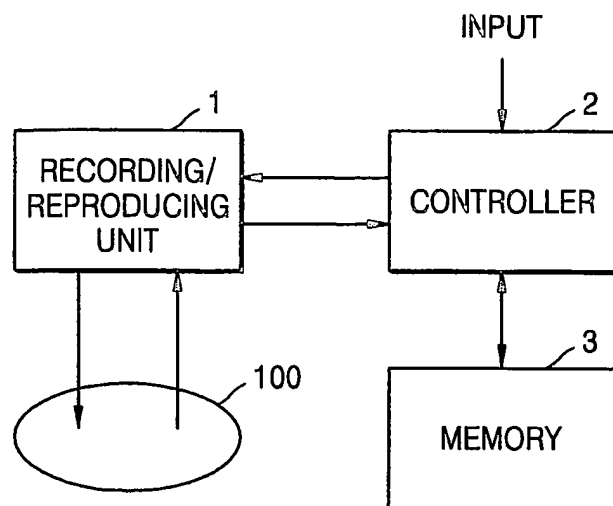

17/17

FIG. 18

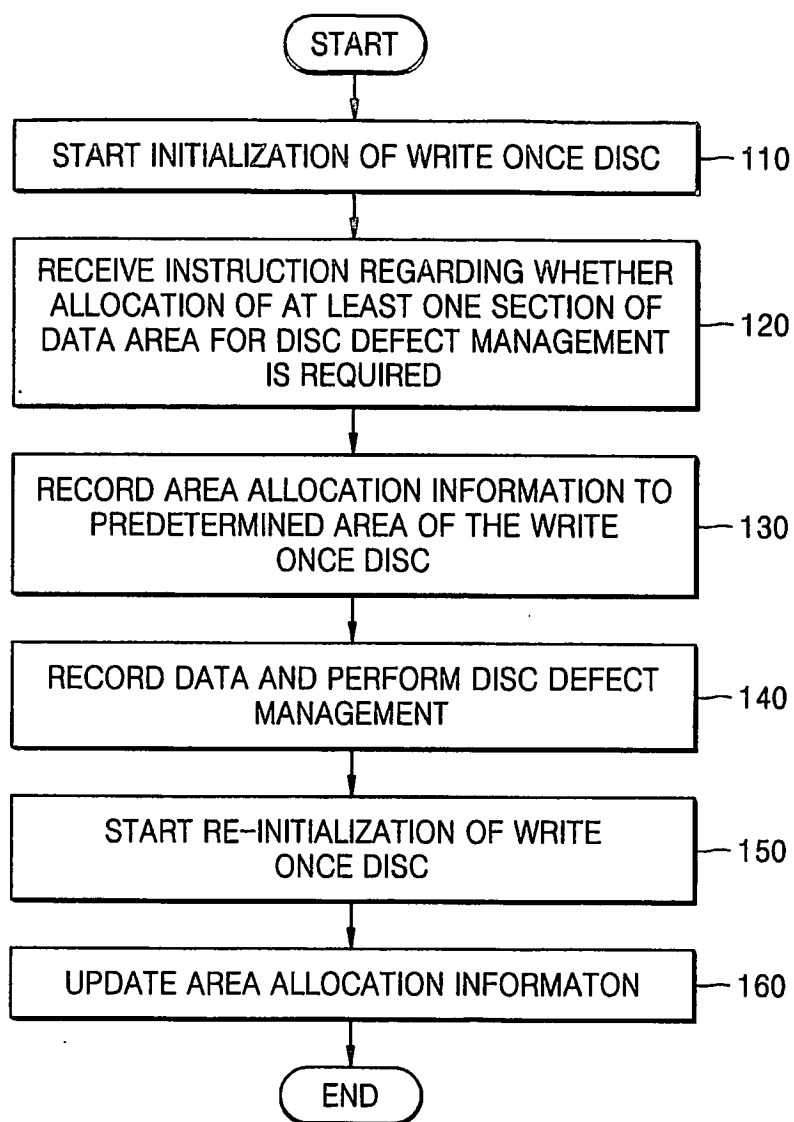

Published Serial No.	TW371752		
Title	Optical disc having variable spare area rates and method for variably setting the rate of spare areas in the optical disc		
Patent type	B		
Date of Grant	1999/10/11		
Application Number	87106759		
Filing Date	1998/5/1		
IPC	G11B20/12		
Inventor	YEO, WOON-SEONG(KR)		
Priority	Country	Application Number	Priority Date
	KR	19970019695	5/21/1997
Applicant	Name	Country	Individual/Company
	LG ELECTRONICS INC.	KR	Company
Abstract	<p>In a method for setting variable areas of an optical disc which variably sets spare area rates of a prescribed quantity provided for preparing liable-occurring recording error due to a defect of the optical disc and in the optical disc having the variable spare areas, the total quantity of the spare areas installed to the optical disc may be the same as the prescribed quantity. Also the size rates of the spare areas are variably set in the radius direction by centering about a center portion of the optical disc. Particularly, the more spare area rates are given to the inner circumferential portion and outer circumferential portion, and the less spare area rates are given to the center portion which is relatively stable portion, thereby minimizing the effect occurring rate to decrease the number of defective discs.</p>		

中 華 民 國 專 利 公 報 (19) (12)

(11) 公告編號 : 371752

(44) 中華民國 88 年 (1999) 10 月 11 日

發 明

全 3 頁

(51) Int. Cl. ⁵ : G11B20/12

(54) 名 稱 : 具有可變式備用區比率之光碟及該可變式備用區比率之設定方法

(21) 申 請 案 號 : 87106759

(22) 申請日期 : 中華民國 87 年 (1998) 05 月 01 日

(72) 發 明 人 :

呂運盛

韓國

(71) 申 請 人 :

耶爾基 (LG) 電子股份有限公司

韓國

(74) 代 理 人 : 黃世興 先生

1

2

[57]申請專利範圍：

1. 一種具有可變式備用區比率之光碟，係包括：

一主區儲存以數位化資料，該主區分成多數區域；以及

一備用區係位於該等區域之各區域內以供儲存數位化資料者；

其中各備用區在各區域中所佔之比率係不同而可予改變者。

2. 如申請專利範圍第 1 項之具有可變式備用區比率之光碟，其中該等備用區之比率係自該光碟之中段徑向位置以向內及向外之徑向方向對稱地改變其比率大小者。

3. 如申請專利範圍第 1 項之具有可變式備用區比率之光碟，其中該等備用區之比率大小係沿著光碟之徑向方向遞增或遞減者。

4. 如申請專利範圍第 1 項之具有可變式備用區比率之光碟，其中該等備用區之比率係自該光碟之中段徑向位置以向內及

向外之徑向方向增加其比率大小之分佈者。


5. 如申請專利範圍第 1 項之具有可變式備用區比率之光碟，其中該光碟係自圓心向外分成 23 區域者；而該等備用區比率大小之分配係包括：第 0 區(域)10.73%；第 1 區(域)10.75%；第 2，3 區分別為 8.06%；第 4，5 區分別為 5.37%；第 6，7 區分別為 2.68%；第 8 至 12 區分別為 2.69%；第 13 至 15 區分別為 2.68%；第 16，17 區分別為 2.69%；第 18，19 區分別為 5.37%；第 20 區為 8.06%；第 21 區為 8.05%；第 22 區為 10.74%；而第 23 區則為 10.73%。

10. 6. 如申請專利範圍第 1 項之具有可變式備用區比率之光碟，其中該光碟係自圓心向外分成 23 區域；而該等備用區比率大小之分配係包括：第 0 區(域)8.05%；第 1 至 3 區分別為 8.06%；第 4，5 區分別為 5.37%；第 6，7 區分別為 2.68%；第 8 至 12 區分別為 2.69%；第 13 至 15 區分別為 2.68%；第 16，17 區分別為 2.69%；第 18，19 區分別為 5.37%；第 20 區為 8.06%；第 21 區為 8.05%；第 22 區為 10.74%；而第 23 區則為 10.73%。


- 68%；第8至12區分別為2.69%；第13至15區分別為2.68%；第16至18區分別為5.37%；第19，20區分別為8.05%；第21，22區分別為8.05%；而第23區則為8.72%。
- 7.一種設定一光碟中備用區比率之方法，係包括：改變光碟中各該備用區之比率大小使沿著該光碟徑向方向之該等備用區之比率大小呈現相對差異性者。
- 8.如申請專利範圍第7項之設定一光碟中備用區比率之方法，其中改變光碟中備用區之比率大小之步驟係自該光碟之中段徑向位置以向內及向外之徑向方向對稱地改變其比率大小者。
- 9.如申請專利範圍第7項之設定一光碟中備用區比率之方法，其中改變光碟中備用區之比率大小之步驟係自該光碟之中段徑向位置以向內及向外徑向方向增加其比率大小之分佈者。
- 10.如申請專利範圍第7項之設定一光碟中備用區比率之方法，其中改變光碟中備用區之比率大小之步驟係依光碟之徑向方向遞增或遞減其比率大小者。
- 11.一種光碟，係包括：
一主區儲存以數位化資料者；以及
一備用區供儲存數位化資料之用者，該備用區在主區中所佔比率大小係依光碟之徑向方向向外增加者。
- 12.如申請專利範圍第11項之光碟，其中該主區包括多數區域，而該等備用區則包括位於各該區域中之各備用區域，係沿著該光碟向外之方向增加該備用區域在各主區區域中所佔之比率大小者。
- 13.如申請專利範圍第12項之光碟，其中該等備用區係自該光碟之第一徑向位置向著光碟之外緣增加其相對之比率大小者。
- 14.如申請專利範圍第13項之光碟，其中

- 該第一徑向位置係指介於該光碟內緣與外緣間之一中點者。
- 15.如申請專利範圍第12項之光碟，其中該等備用區域係自該光碟之第一徑向位置朝向第二徑向位置增加其相對比率大小，該第一徑向位置係指介於該光碟裡緣與外緣間之一中點者，而該第二徑向位置係位於該第一徑向位置之徑向之外者。
- 16.一種光碟，係包括：
一主區儲存以數位化資料者；以及
一備用區供儲存數位化資料之用者，該備用區在主區中所佔比率大小係依光碟之徑向方向向內減少者。
- 17.如申請專利範圍第16項之光碟，其中該主區包括多數區域，而該備用區包括一位於各該主區區域中之一備用區域，係沿著該光碟向內之徑向方向減少該備用區域在主區區域中所佔之比率大小者。
- 18.如申請專利範圍第17項之光碟，其中該等備用區係自該光碟之第一徑向位置向著光碟之內緣減少其相對之比率大小者。
- 19.如申請專利範圍第18項之光碟，其中該第一徑向位置係指介於該光碟內緣與外緣間之一中點者。
- 20.如申請專利範圍第17項之光碟，其中該等備用區域係自該光碟之第一徑向位置朝向第二徑向位置減少其相對比率大小，該第一徑向位置係指介於該光碟裡緣與外緣間之一中點者，而該第二徑向位置係位於該第一徑向位置之徑向之內者。
- 圖式簡單說明：
第一圖顯示一般光碟之形式圖；而
第二圖則為該光碟依徑向方向(R)碟片厚度(T)變化之示意圖。

(3)

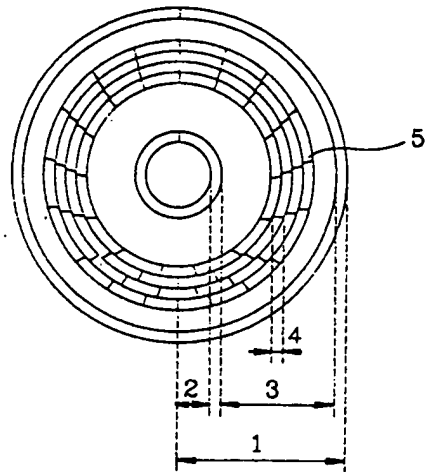

第一圖

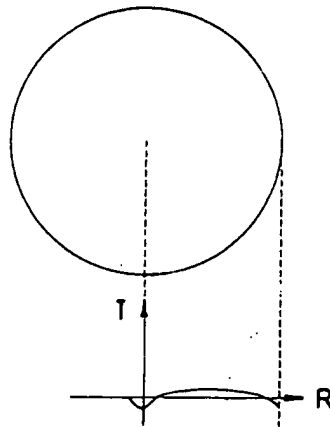

第二圖

